



unveils  
a revolutionary  
new technology



**HDS PUMPS**  
specially for fountains




High discharge submersible pumps for fountains



	HDS1008	HDS2312
Max. Delivery Height	7500L/H	12000L/H
Max. Height	4.2 m	7.5 m
Power	100 W	230 W
Outlet Connection	25mm (1")	25mm (1")
Intake Connection	25mm (1")	25mm (1")
Power Cord	5-10 m	5-10 m
Size(mm)	308x128x148mm	308x128x148mm

	HDS5025	HDS5033	HDS7038
Max. Delivery Height	25000L/H	33000L/H	38000L/H
Max. Height	11m	9.2 m	11.5 m
Power	500 W	500 W	700 W
Outlet Connection	38mm (1½")	51mm (2")	51mm (2")
Intake Connection	38mm (1½")	51mm (2")	51mm (2")
Power Cord	10 m	10 m	10 m
Size(mm)	388x175x203mm	398x175x203mm	398x175x203mm

- New technology split tube motor
- Highly efficient energy saving design
- Resin filled tamperproof/waterproof motor
- Large-2 step prefilter, easy to disassemble
- Minimum maintenance
- Ideal application for small ponds, waterfalls, large aquariums
- Suitable for sea/saline water
- Easily removable rotor assembly
- Suitable also for non-submersible use
- Thermal overload protected
- Wear-resistant ceramic bearings for continuous and trouble-free use.

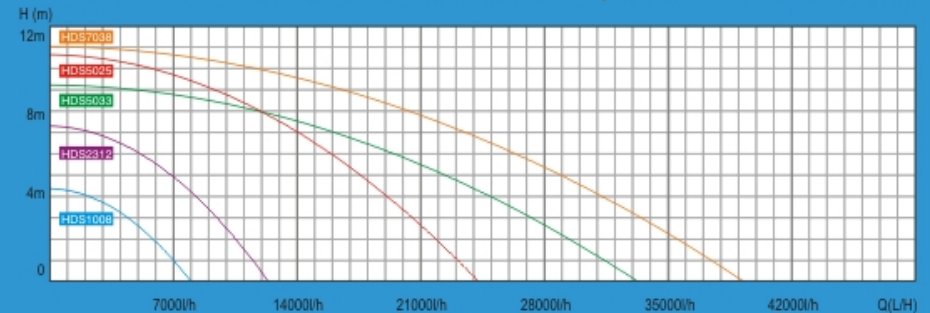

**Indoma Industries Pvt. Ltd.**

4805/24, Bharat Ram Road, Darya Ganj, New Delhi-110002(India) E-Mail: [contactus@indomaindustries.com](mailto:contactus@indomaindustries.com)